



EcoGun 910

Spray gun airless manual

The **EcoGun 910** is a 2-piston state-of-the-art gravity-feed air spray gun. Designed for professional use, performance and durability are its distinguishing characteristics in order to meet highest demands. Via exchangeable air caps with different atomization performance, this spray gun ensures maximum flexibility. User-friendly handling is guaranteed by the light weight and ergonomic body. The **EcoGun 910** is predestined for the automotive and general industry, refinishing, wood and glass painting, but also equally suitable for almost any other paint coating purposes.



CUSTOMER BENEFITS



2-in-1-Technology: Change from reduced overspray (conventional) to minimum overspray (LVL) within seconds

Quick-clip needle removal and insertion

All air caps with 1/4 revolution bayonet lock

Pressure measurement located directly in front of the air cap

Very high air volume and material regulation

Very high spray pattern width regulation (round to flat)


Lightweight design with optimum center of gravity allows ergonomic handling

ATEX Ex II 2G T60°C X

Technical datasheet

EcoGun 910

CHARACTERISTICS

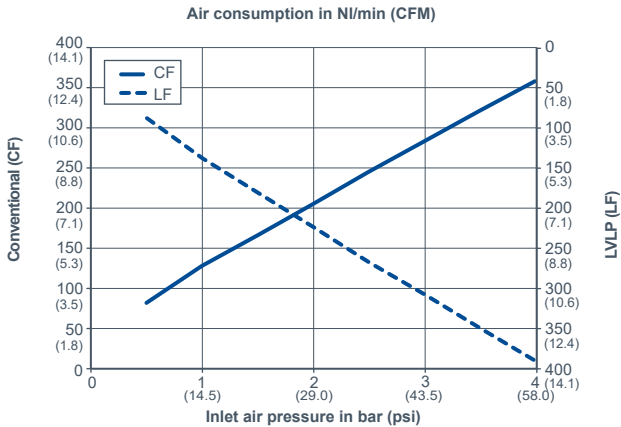

NOZZLE SELECTION

| Air cap | Nozzle diameters [mm] / Media |
|---------|--|
| CF (A) | 0.5 / 0.8 / 1.0 / 1.2 |
| LF (A) | Fine finish coating, top coats |
| CF (B) | 1.3 / 1.4 / 1.5 / 1.6 |
| LF (B) | General coatings e.g. base coats, primers, fillers |
| CF (C) | 1.8 / 2.0 / 2.5 |
| LF (C) | General coatings e.g. base coats, primers, fillers |
| CF (D) | 3.0 |
| LF (D) | General coatings, high viscosity materials |

SPECIFICATION

| | |
|----------------------------|-----------------------------|
| Weight | 490 g |
| Material gun body | Aluminium anodized |
| Parts contacted by media | SST, ALU anodized |
| Connector fluid | G 3/8" |
| Connector air | G 1/4"; 1/4" NPT |
| Recom. air pressure | 2,0 - 3,0 bar (29 - 44 psi) |
| Air pressure max. | 8,0 bar (116 psi) |
| Operating temperature max. | 60 °C (140 °F) |
| ATEX marking | Ex II 2G T60°C X |

ORDER NUMBERS

| Part no. | Air cap | Nozzle size | Cup |
|-----------|---------|-------------|------------------|
| N36200126 | CF | 1.8 | Cup 600 ml, 3/8" |
| N36200247 | CF | 2.0 | Cup 600 ml, 3/8" |
| N36200336 | LF | 1.4 | Cup 600 ml, 3/8" |
| N36200369 | CF | 3.0 | Cup 600 ml, 3/8" |
| N36200371 | LF | 1.8 | Cup 600 ml, 3/8" |
| N36200402 | LF | 2.0 | Cup 600 ml, 3/8" |
| N36200403 | CF | 1.6 | Cup 600 ml, 3/8" |
| N36200404 | LF | 2.5 | Cup 600 ml, 3/8" |
| N36200405 | CF | 2.5 | Cup 600 ml, 3/8" |
| N36200406 | LF | 1.6 | Cup 600 ml, 3/8" |

ACCESSORIES

| Part number | Fluid pressure |
|-------------|--|
| W40030272 | Hose 9x16 |
| M58100061 | Hose connection 9x16 G1/4" |
| M01010185 | Push-in nipple DN7 G1/4"i Ms |
| N40030046 | Quick change connection DN7 G1/4" a Ms |
| N36960038 | Cleaning kit EcoGun 22pcs |
| N08160001V | Pressure pot |
| N08170001V | Pressure pot A |
| N92120001V | EcoPump AD Package |

Further accessories available on webshop